




XANTUS PRODUCTS

System Defender

- Most proven sealant formula to protect against leaks
- Guards against moisture, converting it to a synthetic oil
- Protects against mechanical friction and excess noise
- No need to pump down units
- Can be installed in seconds

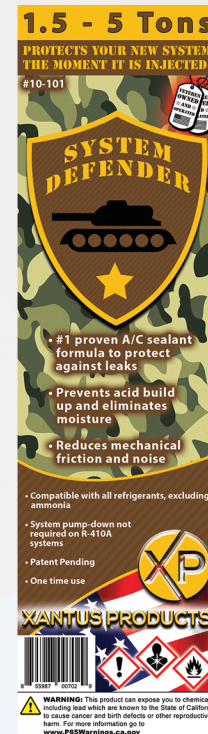

Treats
Up to 5 tons

Description:

A new system is not a cheap investment so put your customers at ease with System Defender! A product designed to alleviate and guard against common new system errors and issues. Small leaks are common on new system installs, with that comes the potential for exposure to moisture and costly recharges. Simply install our product when you install your new system and relax knowing System Defender is on duty!

Application:

- Designed for split systems, heat pumps, microchannel coils, packaged units, and mini splits
- No injection hose or caulk gun needed
- No need to pump down units
- Ultra concentrated formula
- One time use

Packaging:

System Defender Direct Inject

#10-101

Directions for Use:

1. Turn the a/c system on and verify the unit is running. Connect System Defender to the low-side service port of the system. (This is generally the large line.)
2. Connect the manifold refrigerant hose to the refrigerant supply tank. Verify the high and low side valves on the manifold are closed before proceeding. Purge the low pressure hose when connecting to Maximum Dye.
3. Open low-side valve and watch for the tube to clear. (This will ONLY take a few seconds!) Turn off low-side manifold valve as soon as the tube is clear. Turn off refrigerant gas. Verify the system is charged to Manufacturer's specifications! Disconnect low-side hose from System Defender. Install service port cap. Run the a/c unit at least one hour after installing System Defender. (Do not bend or kink hose!)

